

UNCLASSIFIED

AD NUMBER
ADB013689
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies only; Test and Evaluation; 30 AUG 1976. Other requests shall be referred to Naval Air Systems Command, Washington, DC 20361.
AUTHORITY
USNASC ltr, 3 Aug 1978

THIS PAGE IS UNCLASSIFIED

THIS REPORT HAS BEEN DELIMITED
AND CLEARED FOR PUBLIC RELEASE
UNDER DOD DIRECTIVE 5200.20 AND
NO RESTRICTIONS ARE IMPOSED UPON
ITS USE AND DISCLOSURE.

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED.

✓

2

NWSC/CR/RDTR-34

ADB013689

PHOTOMETRIC AND NEAR INFRARED
RADIOMETRIC MEASUREMENT SYSTEMS

NAVAL WEAPONS SUPPORT CENTER
APPLIED SCIENCES DEPARTMENT
CRANE, INDIANA 47522

30 August 1976

FINAL REPORT for Period 30 September 1974 to 30 June 1976


Distribution limited to U.S. Government agencies only;
Test and Evaluation: 30 August 1976. Other requests
for this document must be referred to Commanding Officer,
Naval Weapons Support Center, Applied Sciences Department,
Crane, Indiana 47522.

Prepared for
COMMANDER
NAVAL AIR SYSTEMS COMMAND
WASHINGTON, D. C. 20361

AD No. _____
DDG FILE COPY

DDC
RECEIVED
SEP 29 1976
A

Submitted

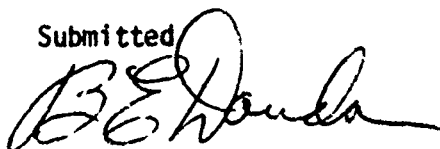A handwritten signature in dark ink, appearing to read "B. E. Douda". The signature is fluid and cursive, with the first letters of the first and last names being capitalized and prominent.

B. E. DOUDA, Manager
Chemical Sciences Branch
Pyrotechnics Division
Applied Sciences Department

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NWSC/CR/RDTR-34	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) PHOTOMETRIC AND NEAR INFRARED RADIOMETRIC MEASUREMENT SYSTEMS, ""	5. TYPE OF REPORT & PERIOD COVERED Final rept. 30 Sep 1974 - 30 June 1976	
6. AUTHOR(s) Forrest L./Burton Carl E./Dinerman	7. CONTRACT OR GRANT NUMBER(s) Work Request N6053076NR30018	
8. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Weapons Support Center Applied Sciences Department Crane, Indiana 47522	9. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 62760N, WF53538, WF53538500	
10. CONTROLLING OFFICE NAME AND ADDRESS Naval Air Systems Command (AIR-350E) Washington, D. C. 20361	11. REPORT DATE 30 August 1976	
12. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) 12 13p.	13. NUMBER OF PAGES	
14. SECURITY CLASS. (of this report) Unclassified		15. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Distribution limited to U.S. Government agencies only; Test and Evaluation: 30 August 1976. Other requests for this document must be referred to Commanding Officer, Naval Weapons Support Center, Applied Sciences Department, Crane, Indiana 47522.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) 16 WF53-538 17 WF53-538-500		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Pyrotechnics Flare Radiometry Illuminating Flare Radiation Near Infrared Photometer Emission Detector micrometers		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report describes the details of calibration, operation, and construction of a photometric, and a 0.73-0.97 μ m near infrared radiometric measurement system, both constructed at NAVWPNSUPPCEN Crane for measure- ments of flare plume candlepower and radiant intensities, respectively.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-014-6601

UNCLASSIFIED

409351

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

FORM 100-10
1. TITLE FOR
2. DATE
3. BY
4. PROJECT
5. SUBJECT
6. DISTRIBUTION/AVAILABILITY
7. LIT. AVAIL. REF. OR SPL.

B

INTRODUCTION

In the improvement of existing flares and in the development of new flare concepts, it is necessary to measure candlepower and near infrared radiation. This report describes the details of calibration, operation, and construction of a photometric measurement system, and a 0.73-0.97 μm near infrared radiometric measurement system, both constructed at NAVWPIISUPPCEN Crane. The block diagram (Figure 1) is the same for both systems. The report describes each system separately. The description of each system is divided into two sections: (a) calibration and operation; and (b) construction details.

PHOTOMETER SYSTEM

Calibration and Operation

The photometer, details of which are described in the Construction Details section of this section, is calibrated against NBS Standard Lamp No. 9789, 1000 watt tungsten filament lamp¹ rated at 1070 candlepower. An optical bench is used and the lamp is properly shielded. We use the relationship

$$\frac{1070}{D^2} = E \quad (1)$$

where E is the calculated illuminance in footcandles, and D is the distance in feet between the photometer and the standard lamp. For each distance, the irradiance E is calculated using equation (1) and plotted against the observed voltage at that distance. See Figure 2. The luminous intensity (candlepower), in candles, is calculated for a flare according to

$$I(\text{cd}) = E \cdot D^2 \quad (2)$$

where E is the illuminance in foot candles, as determined from the observed voltage by using the calibration curve, and D is the distance in feet between the photometer and the flare. If the approximate candlepower of a flare is known beforehand, the photometer-to-flare distance is adjusted to keep the output in the linear region of operation.

¹General Electric Co., Cleveland, Ohio.

The output is recorded on a Moseley² strip chart recorder, and can be integrated as well.

Construction Details

The photometer system and the radiometer systems were built on printed circuit boards for easy component replacement and troubleshooting. The systems use all solid state circuitry and precision components.

The photometer system uses a Weston 856 photocell³ corrected for eye response. An opal glass filter was inserted over the face of the photocell for uniform distribution of light. The field of view is $\pm 12.5^\circ$.

The photometer detector/opal glass combination is mounted in a separate housing from the amplifier and the output signal is fed to an amplifier circuit through a coaxial cable. The input amplifier for the detector is also mounted on a printed circuit board in a precision current to voltage amplifying mode. The amplifier is a Burr Brown⁴ 3341/15C inverting field effect transistorized line driving operational amplifier. This amplifier has an extremely wide bandwidth with fast slewing and settling characteristics, along with high gain accuracy and linearity. This amplifier is designed to withstand input voltages as high as the supply voltage without damage. The output stage is internally current limited to withstand short-circuit to ground conditions.

The feedback resistor is a precision 10 turn variable resistor to give a linear 0 to 5 volts output. The output of this amplifier is then coupled to a BNC connector for input to the recorder or integrator.

Figure 3b and 3c show the electronic schematics.

The Model P2.15.300 power supply⁵ features dual $\pm 15\text{VDC}$ output with up to 0.01% regulation, automatic short circuit protection, and is encapsulated with hermetically sealed components and tantalum capacitors for full rated operation through $+85^\circ\text{C}$.

²Hewlett-Packard, Inc., Palo Alto, California.

³Weston, Inc., Newark, New Jersey.

⁴Burr-Brown Research Corporation, Tucson, Arizona.

⁵Semiconductor Circuits Inc., Haverhill, Massachusetts.

The power supply is identical in the photometric and near infrared system. See Figure 4 for a schematic.

NEAR INFRARED (0.73-0.97 μm) SYSTEM

Calibration and Operation

The total relative system response (filter and detector) is shown in Figure 5. The wavelengths 0.73 and 0.97 μm were chosen since they are the points at which the relative response has fallen off to 0.5.

The equations regarding the calibration and operation of the radiometer are as follows:

$$V = c \cdot A \cdot R^{-2} \int N(\lambda) \cdot s(\lambda) \cdot \tau(\lambda) \cdot \tau_a(R, \lambda) d\lambda \quad (3)$$

where

V is the volts observed on the meter or chart recorder

c is a constant, in $V/W \cdot \text{cm}^{-2}$

A is the area in cm^2 of the blackbody source aperture

R is the source-to-detector distance, in cm

$N(\lambda)$ is the known radiance of a blackbody, in $W \cdot \text{cm}^{-2} \cdot \text{sr}^{-1} \cdot \mu\text{m}^{-1}$

$s(\lambda)$ is the (dimensionless) relative spectral response of the detector

$\tau(\lambda)$ is the (dimensionless) transmittance of the filter

$\tau_a(R, \lambda)$ is the (dimensionless) transmittance due to atmospheric constituents.

In the spectral region 0.73-0.97 μm , $\tau_a = 1$. Therefore,

$$V = c \cdot A \cdot R^{-2} \int N(\lambda) \cdot s(\lambda) \cdot \tau(\lambda) d\lambda \quad (4)$$

Since $N(\lambda)A = J(\lambda)$, the radiant intensity in $W \cdot \text{sr}^{-1}$, we can write

$$V = c \cdot R^{-2} \int J(\lambda) \cdot s(\lambda) \cdot \tau(\lambda) d\lambda \quad (5)$$

Calibration in this spectral region consists of placing the radiometer on an optical rail at a series of distances from a properly shielded and powered NBS-traceable lamp, of known spectral radiant intensity $J(\lambda)$, and recording the voltages obtained. Plotting V against R^{-2} will allow c to be calculated in $V/W \cdot cm^{-2}$. Figure 6 shows the results of a calibration, performed with a 1000 watt tungsten-halogen lamp (EG&G standard lamp serial number A163A, and their calibration test number 107019).⁶

In order to determine the $W \cdot sr^{-1}$ from a flare, (5) is used, except that $J(\lambda)$ is now the unknown instead of c . If we assume that $J(\lambda)$ doesn't vary much in the $0.73-0.97 \mu m$ interval, then it can be taken out of the integral.

$$V = c \cdot R^{-2} \cdot J' \int s(\lambda) \cdot \tau(\lambda) d\lambda \quad (6)$$

where

$$J' = \frac{J(\lambda) d\lambda}{\Delta\lambda} \quad (7)$$

Then

$$J' = \frac{V}{c \cdot R^{-2} \int s(\lambda) \cdot \tau(\lambda) d\lambda}, W \cdot sr^{-1} \cdot \mu m^{-1} \quad (8)$$

Finally

$$J_{BAND} = J' \Delta\lambda = J'(0.234), W \cdot sr^{-1} \quad (9)$$

Construction Details

The radiometer system uses a PIN-10D silicon photodiode⁷ responding from about 0.35 to $1.1 \mu m$. A Corning 1-64 and 2-58 filter combination⁸ was selected to limit system response to the near infrared. The field of view is $\pm 12.5^\circ$.

⁶EG&G, Electro-Optics Division, Salem, Massachusetts.

⁷United Detector Technology, Inc., Santa Monica, California.

⁸Corning Glass Works, Corning, New York.

The output signal is fed to the amplifier circuit through a coaxial cable.

The input amplifier for the detector is mounted on a printed circuit board, in a precision current to voltage amplifying mode. The amplifier is an Intech A157 F.E.T. input operational amplifier. This amplifier has wideband, fast response characteristics and provides stable operation with capacitive loads up to 1000 pfd. The feedback resistor is a handpicked precision 10 K Ω resistor to give a linear voltage output from -10VDC. The output of the amplifier is then coupled to a BNC connector for input to the recorder or integrator.

See Figure 3a for a schematic.

The power supply has been described in Construction Details in the Photometer System section.

^aIntech Inc., Santa Clara, California.

PARTS LIST

<u>Designation</u>	<u>Catalog Number</u>	<u>Source</u>
PS-1	P2.15.300	Semiconductor Circuits, Inc., Haverhill, MA
F-1	AGC 1/2	Buss, fuses, St. Louis, MO
LS-1	36N2311	Allied Electronics, Elgin, IL
S-1	5222S	J.S.T. Instruments, Inc., New Haven, CT
Fuse Holder	HJM-H	Buss Fuses, St. Louis, MO
DT-1	856	Doystrom Inc., Newark, NJ
DT-2, DT-3	PIN-10D	United Detector Inc., Santa Monica, CA
Filter 1-64	1-64	Corning Glass Works, Corning, NY
Filter 2-58	2-58	Corning Glass Works, Corning, NY
Opal Glass	2149	Edmund Scientific Co., Barrington, NJ
B.N.C. Connector	UG254A/U	Amphenol Connector Div., Broadview, IL
C-1	CD7FD151J	Cornell-Dubilier Electronics Div., Newark, NJ
C-2, C-3	CD6CD100K	Cornell-Dubilier Electronics Div., Newark, NJ
R-1	RN55D1002F	Allied Electronics, Elgin, IL
R-2	3359P1K	Bourns, Inc., Riverside, CA
R-3, R-4	224P25K	Bourns, Inc., Riverside, CA
A-1	A-157	Intech Inc., Santa Clara, CA
A-2, A-3	3341/15C	Burr-Brown Research Corp., Tucson, AZ

BLOCK DIAGRAM

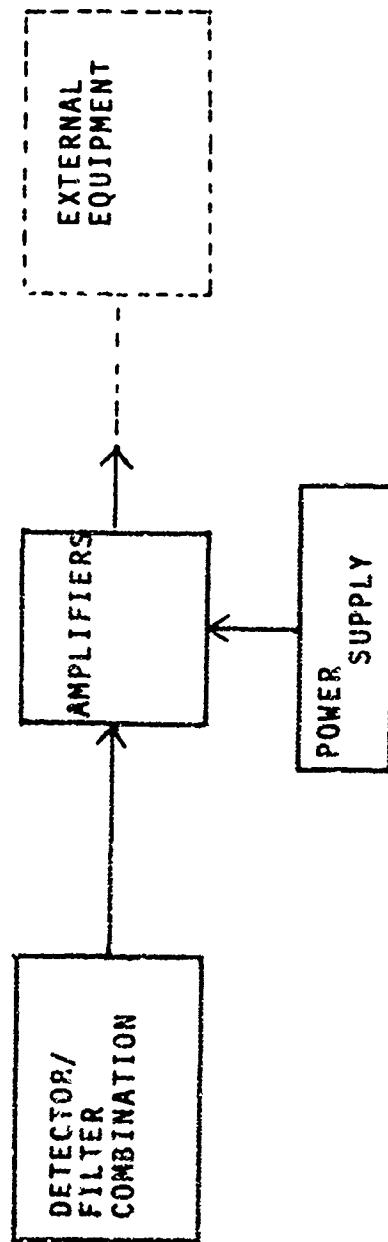


Figure 1. Block Diagram for Photometric and Near Infrared Radiometric Systems

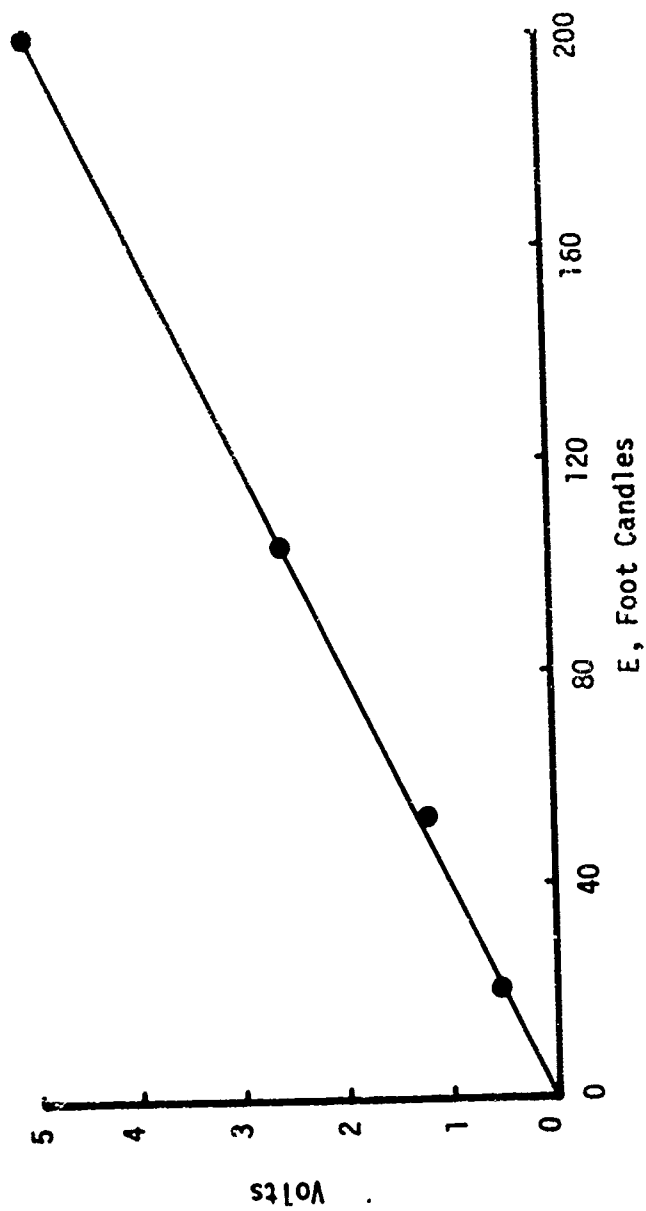


Figure 2. Calibration Curve for the Photometer

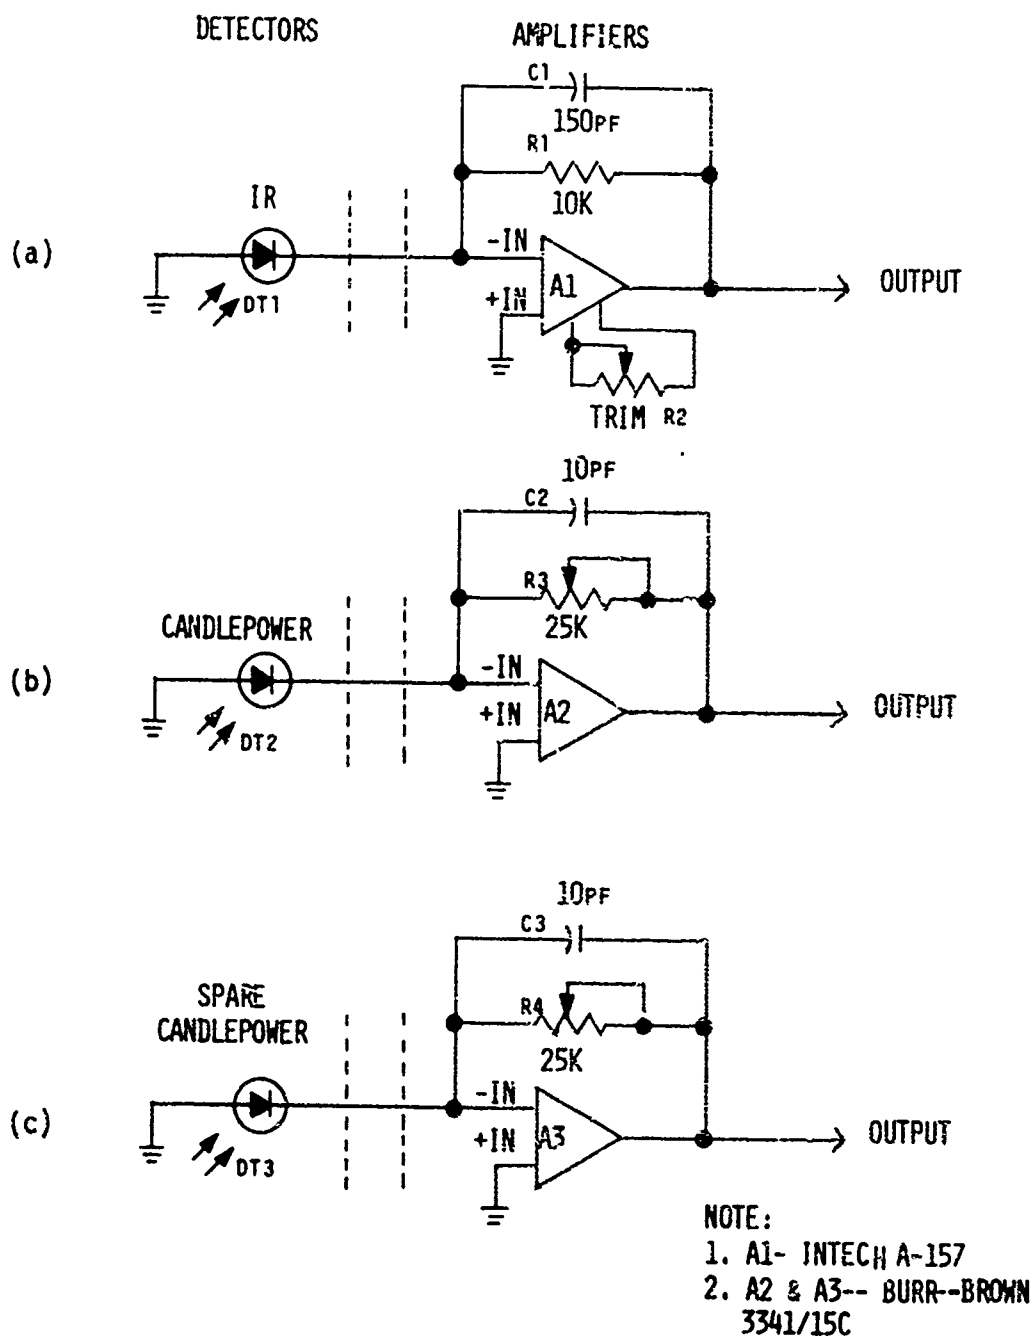


Figure 3. Detector Circuits for Near Infrared Radiation (a), and Visible Radiation (b) and (c).

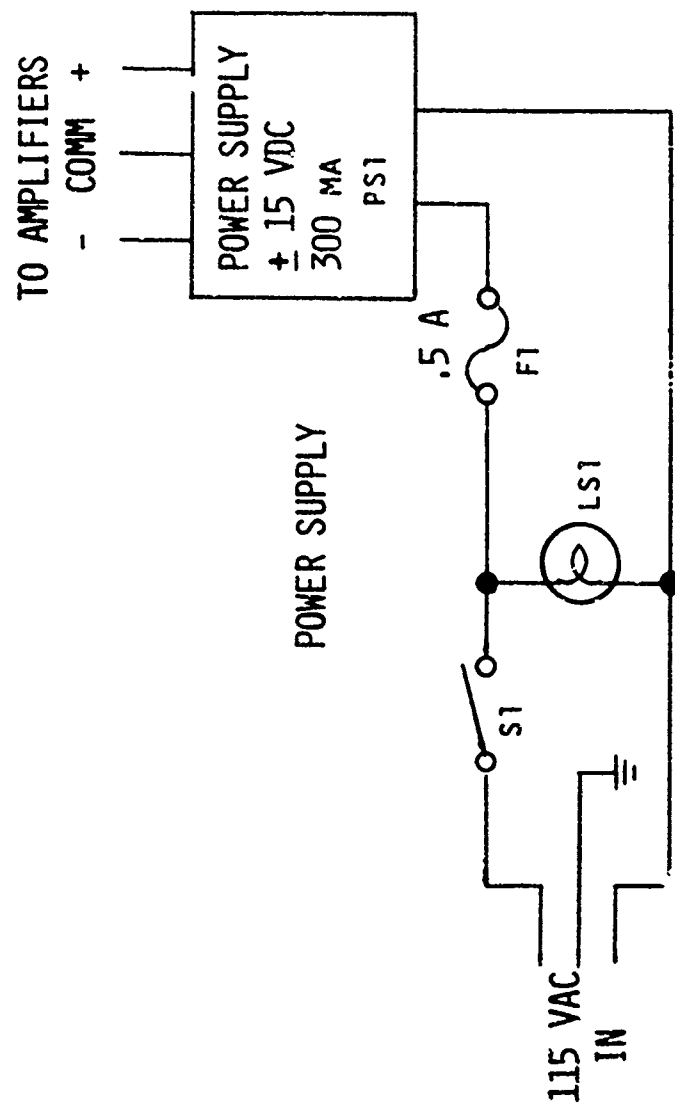


Figure 4. Power Supply for Both Photometric and Near Infrared Radiometric Systems

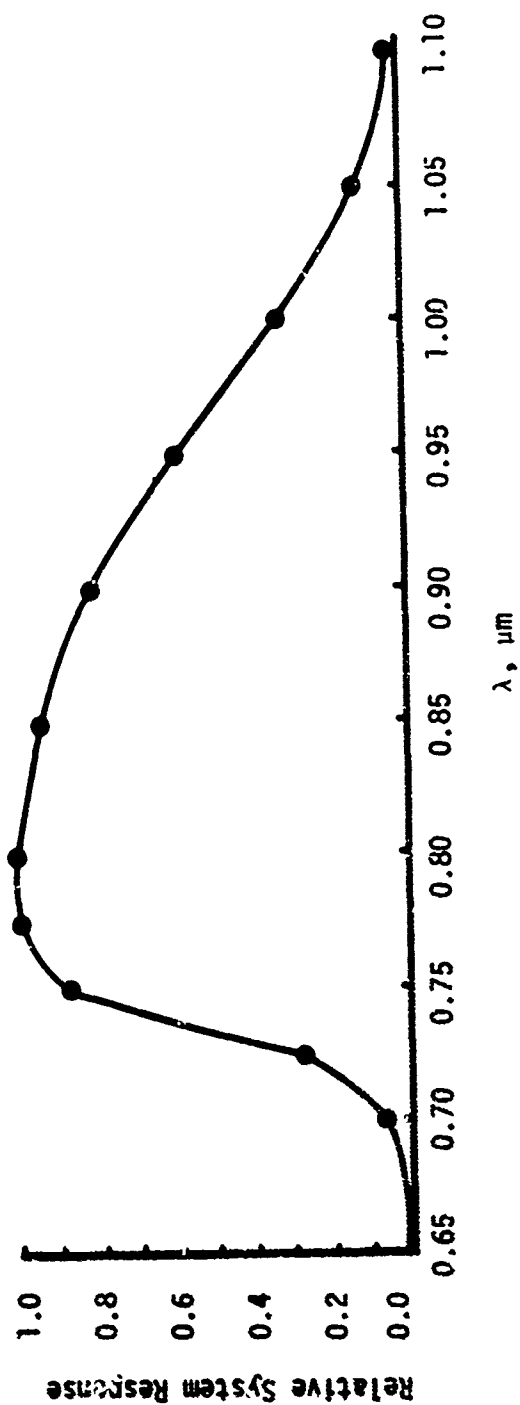


Figure 5. Relative System Response for the 0.73-0.97 μm Radiometer. This curve results from multiplying the detector response by the filter response and normalizing to 1.0.

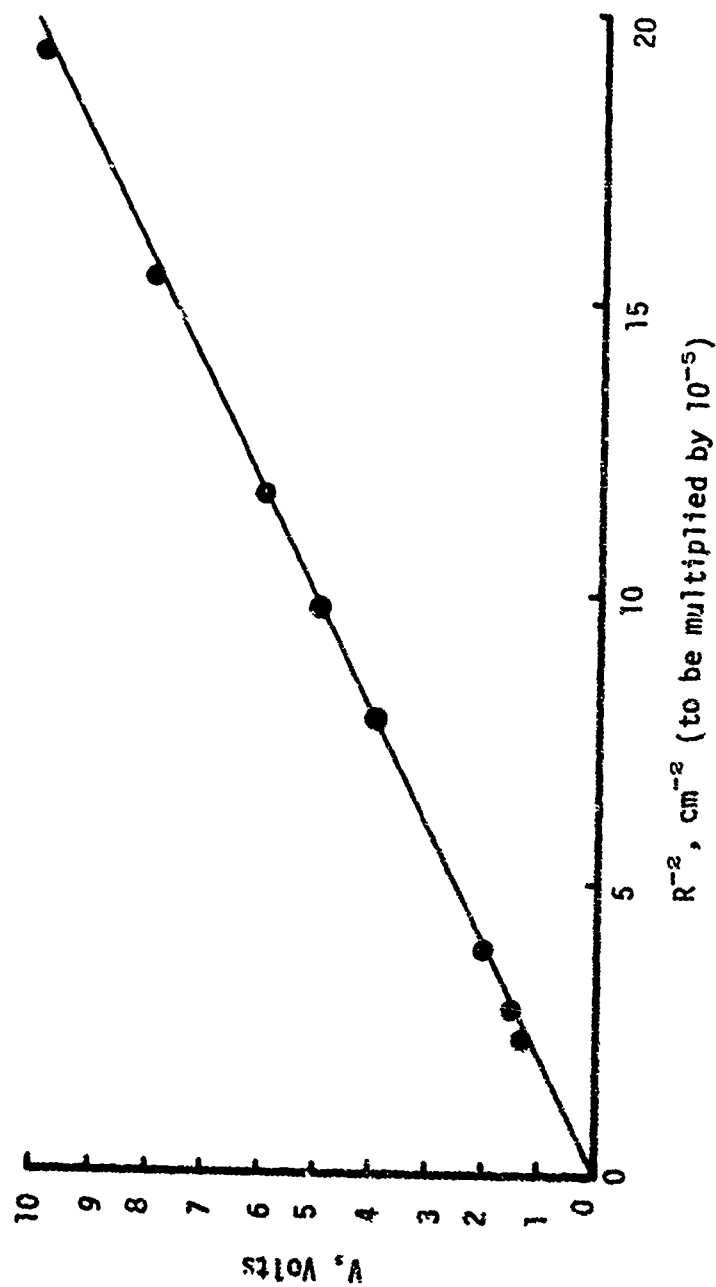


Figure 6. Calibration Curve for the 0.73-0.97 μm Radiometer

DISTRIBUTION LIST

<u>ADDRESS</u>	<u>COPIES</u>
Commander Naval Air Systems Command Department of the Navy Washington, D. C. 20361	
Attention: Code AIR-954, Technical Library	1
Code AIR-53235, Mr. R. Szypulski	1
Code AIR-350, Mr. E. Fisher	2
Code AIR-310C, Dr. H. Rosenwasser	1
Commander Naval Sea Systems Command Naval Sea Systems Command Headquarters Washington, D. C. 20362	
Attention: Code SEA-09G3, Technical Library	1
Code SEA-033, CDR J. R. Gauthey	1
Code SEA-0332, Dr. A. B. Amster	1
Code SEA-0332B, Mr. G. Edwards	1
Code SEA-9921, Mr. W. Greenlees	1
Administrator Defense Documentation Center for Scientific and Technical Information (DDC) Building 5, Cameron Station Alexandria, Virginia 22314	2
Commander Naval Weapons Center China Lake, California 93555	
Attention: Code 6082, Mr. J. Eisel	1
Code 533, Technical Library	1
Code 454, Mr. D. Williams	1
Code 45403, Mr. H. Larsen	1
Code 4544, Dr. M. Nadler	1
Code 45401, Dr. R. Reed	1
Code 454A, Mr. E. Allen	1
Commanding Officer Naval Avionics Facility Indianapolis, Indiana 46218	
Attention: Code PC-010, Mr. P. Collignon	1
Commander Naval Surface Weapons Center White Oak Laboratory Silver Spring, Maryland 20910	
Attention: Code WR, Research & Technology Dept.	1
Code WX-21, Technical Library	1
Code WR-12, Mr. B. White	1

DISTRIBUTION LIST (cont.)

<u>ADDRESS</u>	<u>COPIES</u>
Commander Naval Surface Weapons Center Dahlgren Laboratory Dahlgren, Virginia 22448 Attention: Code DG-50, Mr. R. Morrisette	1
Commander Naval Ordnance Station Indian Head, Maryland 20640 Attention: Code 5232V, Mr. W. Vreath Code 5111A, Mr. F. Valenta	1 1
Commanding Officer Frankford Arsenal Philadelphia, Pennsylvania 19173 Attention: Code SARFA-MDP-Y, Mr. W. Puchalski	1
Commander Edgewood Arsenal Aberdeen Proving Ground, Maryland 21010 Attention: Code SAREA-DE-MMP, Mr. M. Penn Code SAREA-DE-MMP, Mr. A. Deiner	1 1
Commander Ballistic Research Laboratories Interior Ballistics Laboratory Aberdeen Proving Ground, Maryland 21005 Attention: Code DRXBR-IB, Mr. J. R. Ward	1
Commanding Officer Picatinny Arsenal Dover, New Jersey 07801 Attention: Code SARPA-FR-E-L, Mr. T. Boxer Code SARPA-FR-E-L-C, Dr. F. Taylor Code SARPA-TS-S, Technical Library Code SARPA-AD-D-R-4, Mr. A. Neigh Code SARPA-FR-E-L-P, Mr. J. Tyroler	1 1 1 1 1
Commanding General U.S. Army Missile Command Redstone Arsenal Alabama 35809 Attention: Code DRSMI-REI, Mr. T. Jackson Code DRSMI-REO, Mr. G. Widenhofer	1 1
Commander Army Aviation Systems Command Avionics and Weaponization Division St. Louis, Missouri 63166 Attention: Code DRSAB-EVW	1

DISTRIBUTION LIST (cont.)

<u>ADDRESS</u>	<u>COPIES</u>
Commander U.S. Army Material Systems Analysis Agency Aberdeen Proving Ground Maryland 21005 Attention: Code DRX-SY-RE, Mr. J. Sheldon Code DRX-XY-T, Mr. P. Topper	1 1
Commanding General U.S. Army Tank Automotive Command Warren, Michigan 48090 Attention: Code DRSTA-RHFL	1
U.S. Army Foreign Science and Technology Center 220 Seventh Street, N.E. Charlottesville, Virginia 22901 Attention: Code DRXST-CSI, Mr. J. Jacoby	1
Commander Wright-Patterson Air Force Base Ohio 45433 Attention: Code AFWAL/DO, Technical Library	1
Commander Aeronautical Systems Division (AFSC) Wright-Patterson Air Force Base Ohio 45433 Attention: Code ASD/ENAMC, Mr. M. Edelman Code ASD/AEWE/ENADC, Mr. R. Sorenson Code ASD/ENADC, Mr. H. Wigdahl Code ASD/ENAMC, Mr. G. Runseiman	1 1 1 1
Commander Air Force Avionics Laboratory Wright-Patterson Air Force Base Ohio 45433 Attention: Code AFAL/CC Code AFAL/WRW-3, Mr. F. D. Linton Code AFAL/RWI, Dr. B. Sowers	1 1 1
Commander Armament Development and Test Center Eglin Air Force Base Florida 32542 Attention: Code ADTC/SD-3, Mr. S. Lander	1
Commander Air Force Armament Laboratory Eglin Air Force Base Florida 32542 Attention: Code AFATL/DLJW, Mr. A. Beach	1